




## VP3H SERIES PLUNGER & PISTON PUMP

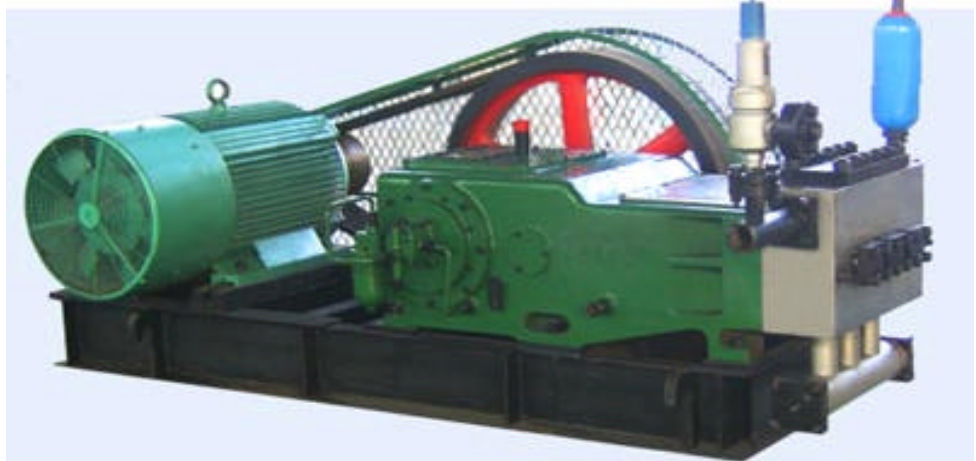

### SPECIFICATIONS:

Power:	300 to 380 HP
Flow Rate:	17—45 Cubic Meters Per Hour
Stroke Per Min (range):	220—390
Pressure Range:	16—40 mPa
Overall Dimensions:	L×W×H: 4390×2413×1380mm

### FEATURES:

- Compact Design Incorporated with Sophisticated Technology
- The Light Weight V-Belt Transmission System (v.s. Gear-pinion system) Provides More Efficient and Reliable Power Transmission and Reduces System Shipping Weight and Installation Dimension, An Ideal Selection for Off-site Mobile Field Operation
- Available in either Plunger and Piston Design for Wide Application
- Unit can be Powered by the Choice Of Operators Preference of Either Electric Motor or Diesel Engine and Can Easily Mounted on a Skid for Transportation and field Installation
- Supported with Factory Trained Field Service Personnel and Spare Parts from Stock Inventory.


### DISTRIBUTED BY:

MANUFACTURER:  
VJF INTERNATIONAL INC  
Phone: 403 538 2963  
Fax: 800 VJF-8862, 800-853-8862  
E-mail: sales@vjfi.com

Note: Product Information as Specified herewith is kept accurate up-to-date at time of its printing, and are for reference only. End user is asked to use Users Instruction Manual shipped with each unit. Product info provided in this flyer is subject to change without notice.

# VJF INTERNATIONAL INC

Brand Name for Quality Oilfield Products



MODEL	Flow Rate m <sup>3</sup> /h	Outlet Pres- sure mPa	Inlet Pres- sure mPa	RPM	STROKE (MM)	Power Rate K.W.	Seat No.
VP3H-40/16	40	16	> 0.2	197	140	250	B2
VP3H-32/20	32	20					
VP3H-26/25	26	25					
VP3H-20/31.5	20	31.5					
VP3H-15/40	15	40					
VP3H-45/16	45	16		220			
VP3H-36/20	36	20					
VP3H-29/25	29	25					
VP3H-22/31.5	22	31.5					
VP3H-17/40	17	40					
VP3H-54/16	54	16		265			
VP3H-44/20	44	20					
VP3H-35/25	35	25					
VP3H-26/31.5	26	31.5					
VP3H-20/40	20	40					
VP3H-60/16	60	16		300			
VP3H-50/20	50	20					
VP3H-40/25	40	25					
VP3H-30/31.5	30	31.5					
VP3H-24/40	24	40					